



## **PRODUCT INFORMATION SHEET**

**Product:** Elasto Seal – Self Priming Cold Applied Joint & Crack Filler

**General:** A technologically advanced SBS Polymer Modified crack sealant designed for the filling and sealing of pavement cracks to prevent the ingress of water, thereby extending the pavement's life. This product provides exceptional elasticity with an elongation factor greater than 475% with a 100% recovery rate.

**Description:** Otech Elasto Seal is a solvent based, highly polymerised cold applied sealant which is easily pourable under ambient conditions. It comprises around 65% solids and when applied at ambient temperatures it provides optimum sealant properties within hours of application, depending on weather conditions.

Otech Elasto Seal has very good high adhesion properties on many surfaces that do not readily adhere to other cold sealants. It will retain its flexibility after continual joint expansions in a wide range of temperatures. Additionally, being a slow set application, no primer is required in the joint prior to the application of the Elasto Seal.


It is recommended that coarse sand, free from clay, is used for product blinding following application, particularly in those circumstances where the area is likely to be trafficked before the sealant has completely set.

**Characteristics:**

Specific Gravity @ 25 °C cSt	0.91
Flash Point	>38 °C
Appearance	Black Liquid
Odour	Bitumen

**Packaging: 205-lt & 20-lt drums**

*Revised April 16*

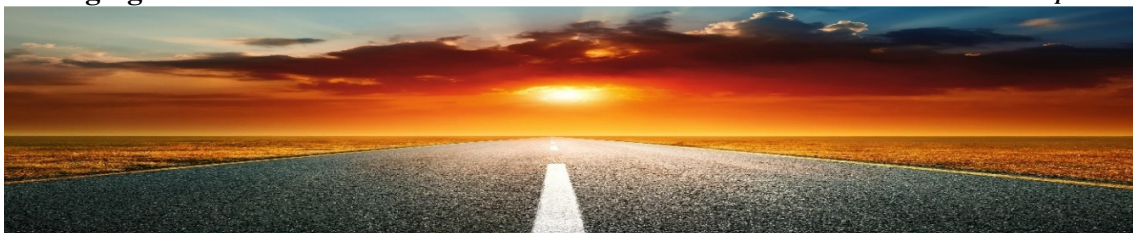

### **Superior Products – Superior Roads**

**O-TECH AUSTRALIA**

**Cnr Boundary Road & Potassium Street, NARANGBA QLD 4504**

**Phone: 07 3203 2833**

**Facsimile: 07 3203 3700**